

Comando SQL

Comunidad alpha:

Custodio torres

Eliecer londoño

Felipe aristizabal

Tablas de la base de datos.

Actividades							Empleados	Países	Perfiles	Seminarios	Predicadores	Tipo_predicadores	Usuarios
id_actividad							descripcion	estado	fecha_ingre	usuario	Haga clic para agregar		
+	1	Bingo	Ok	08/05/2012	Cuzco								
+	2	Ajedrez	Ok	15/05/2012	Juan								
+	3	Parquez	Ok	20/05/2012	Cuzco								
+	4	Futbol	Ok	23/06/2012	Cuzco								
+	5	Tenis	Ok	19/06/2012	Andres								

Consultas:


UPDATE.

```
UPDATE Usuarios SET nombre_usuario = "Juan"
WHERE contraseña="juan1";
```

INSERT INTO:

```
INSERT INTO Usuarios
VALUES (95101717365, "Juan Londoño", "Juan", "juan1", "1");
```


DELETE:

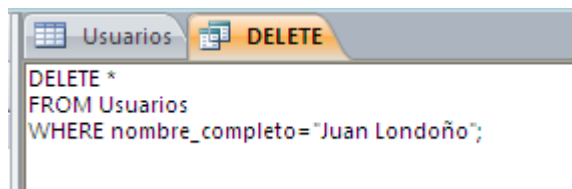

The screenshot shows a SQL query editor with a tab labeled 'Usuarios' and a sub-tab labeled 'DELETE'. The query text is as follows:

```
DELETE *  
FROM Usuarios  
WHERE nombre_completo="Juan Londoño";
```


INSERT:

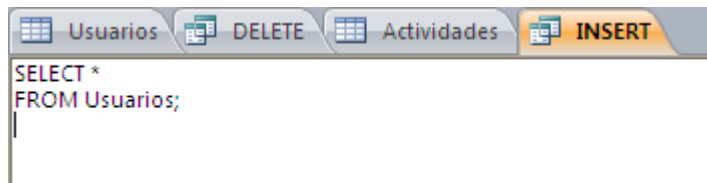

The screenshot shows a SQL query editor with tabs labeled 'Usuarios', 'DELETE', 'Actividades', and 'INSERT'. The query text is as follows:

```
SELECT *  
FROM Usuarios;
```

CONSULTA CON SUBCONSULTA:

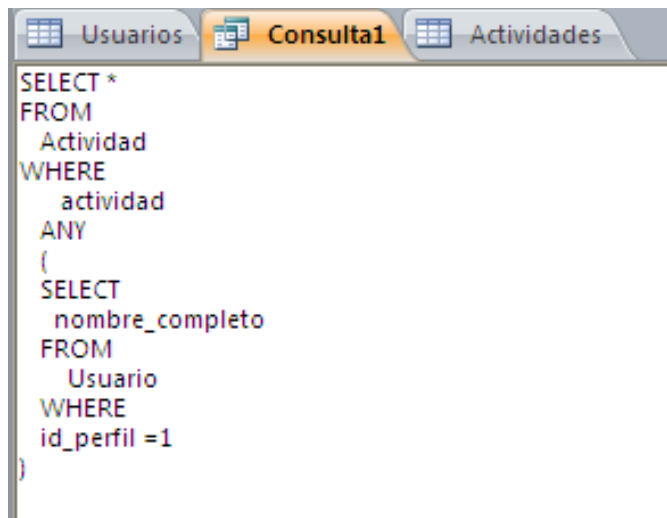

The screenshot shows a SQL query editor with tabs labeled 'Usuarios', 'Consulta1', and 'Actividades'. The query text is as follows:

```
SELECT *  
FROM  
    Actividad  
WHERE  
    actividad  
    ANY  
    (  
        SELECT  
            nombre_completo  
        FROM  
            Usuario  
        WHERE  
            id_perfil =1  
    )
```